

New
2100 Family

IntechMicro

Stations

Hi Power Monitoring

Now includes built in Controllers

- Individually Configurable Analogue Inputs
- Monitoring made easy
- Utilizes latest technology
- Low cost – High performance

Upto 64 stations

Applications

Factory wide monitoring
Cold Stores
Refrigeration
Research
Shipping
Heat Treatment
Mining
Laboratories
Timber processing
Water / Waste Water
Meat Industry
Food Processing
Energy Management
Plastic / Rubber
Textile
Radio communications

- * 16 Analogue Inputs
Pt100, Pt1000, mA, mV & V,
Thermocouple JKNRSTBE
- * 3 Digital inputs (on/off & count)
- * 2 Alarm outputs
- * Analogue input expansion – up to 4
2100M Multiplexers
- * Relay output expansion – 2100-R
16 relay output module
- * Input data memory storage allows the 2100A₁₆
and



- * 4 Analogue inputs
Pt100, Thermister, mA, mV, V &
Thermocouple KJNTE
- * 4 Digital inputs (on/off & count)
Analogue input expansion – up to 4
2100M Multiplexers
- * 4 relay outputs (8 optional)
2 analogue outputs 0~10V or
4~20mA
Transmitter Power supply




- * 12 digital inputs
(on/off & count)
- * 12 relay outputs



Data Hi-way

RS422 RS485 RS232

MicroScan SCADA

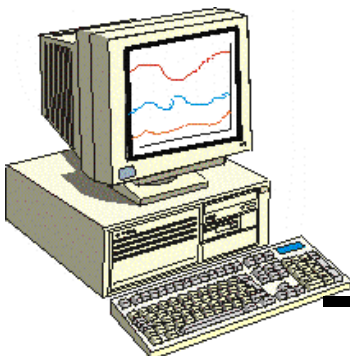

For more details refer www.intech.co.nz

or contact John on email john@intech.co.nz

Intech INSTRUMENTS LTD.

Preliminary Specifications

Common specifications

Power Supply	70-265 Vac / 80~375Vdc 20-90Vdc Selectable on Bd 11~30Vdc optional
Comms Protocols	RS422, RS485, Selectable on Bd RS232 Optional
Comms Baud Rate	19200, 9600, 4800, 2400 Selectable

2100-AI Analogue Input Remote Station

Analogue Inputs	Each Input can be individually selected and scaled within the following ranges. (16 Bit Resolution on each Range) MV: ± 25 mV, ± 50 mV, ± 100 mV, ± 250 mV, ± 500 mV V: ± 1 V, ± 2.5 V, ± 5.0 V, ± 10 V, ± 15 V MA: ± 1 mA, ± 2 mA, ± 4 mA, ± 10 mA, ± 20 mA, ± 40 mA RTD (pt100): $\pm 25^{\circ}\text{C}$, $\pm 50^{\circ}\text{C}$, $\pm 100^{\circ}\text{C}$, - 200/250 $^{\circ}\text{C}$, - 200/500 $^{\circ}\text{C}$, ---200/800 $^{\circ}\text{C}$ TC: J, K, N, R, S, T, with CJC and Linearised mV, V, mA, T/C All differential input with 30Vdc Max between any 2 channels. RTD (Pt100) Single Ended.
Digital Inputs	3 Digital Opto Isolated Inputs 7 to 30 Vdc LED Indicating each Channel
Digital Outputs	3 Digital Opto Isolated Outputs 100 mA dc max. LED Indication each Channel
Expandability	Can drive four 2100-M Multiplexers giving the user an additional 60 Analogue Inputs. Individual Clock and Reset lines provided. LED Indication of Clock/Reset.
Memory	Optional plug in 4 Mbit Memory Board for remote datalogging or data backup. (Not used with 2100M's connected).

A single unit can be interfaced directly to a PC or Modem using RS232. (No 2100-IS Required).

2100-D Digital Input / Output Remote Station

Digital Outputs	12 Isolated Relay Outputs 10 Change over 2 Normally Open 2 A 250 Vac 2 A 30 Vdc 0.3A 110 Vdc 1/10 H.P 125 Vac 1/6 H.P 250 Vac Relay State, Software Selectable with state retention on power down. LED Indication each Channel.
Digital Inputs	12 Digital opto Isolated Inputs 5 to 30 Vdc LED Indication each Channel High Speed Inputs 500 Hz Max.

A single unit can be interfaced directly to PC or Modem using RS232 (No 2100-IS required)